
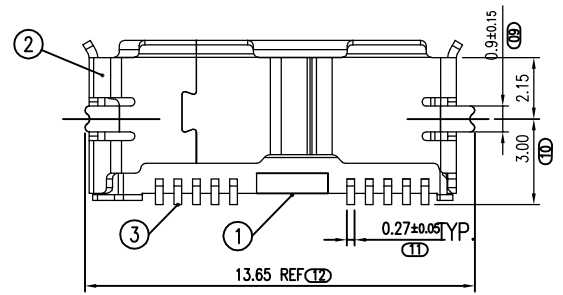
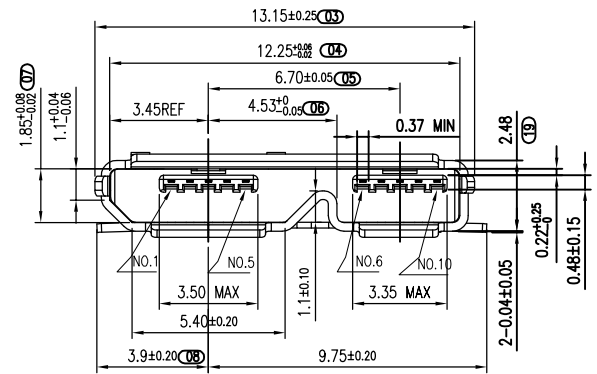
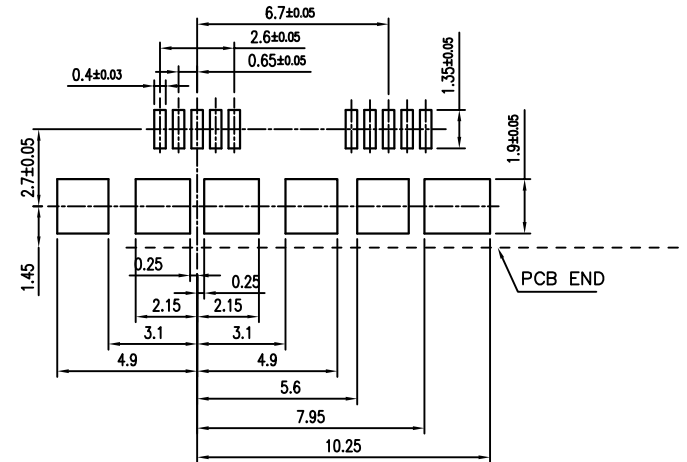
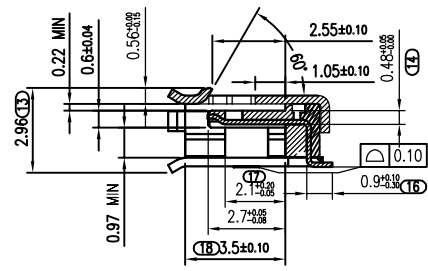


ITEM	PART NAME	QTY	MATERIAL	FINISH/REMARK
1	HOUSING	1	HIGH TEMPERATURE PLASTIC, UL 94 V-0	(Black)
2	SHELL	1	SUS304	
3	CONTACT	5	Phosphor Bronze	1u" Gold

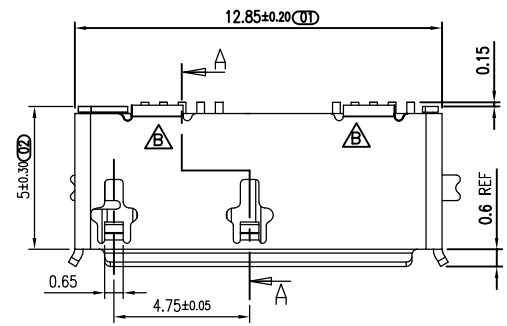

- NOTES:
- INSULATOR:LCP . COLOR-BLACK
  - USB CONTACT: PHOSPHOR BRONZE,0.15mm THICKNESS, GOLD PLATED ON CONTACT AREA, GOLD FLASH OR 50 U" TIN PLATED ON SOLDER TAIL, 80 U" MIN. NICKEL UNDER PLATED OVERALL.
  - SHELL: STAINLESS STEEL ,0.3 THICKNESS, 40U" NICKEL PLATED ON THE SOLDERING TAB.
  - ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE:30mΩ MAXIMUM
    - CONTACT CURRENT RATING:1.5AMPERES
    - DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
    - INSULATION RESISTANCE 100 MΩ MIN
    - OPERATING TEMPERATURE:-40°C ~ 85°C
  - MECHANICAL CHARACTERISTICS:
    - MATING FORCE:35N MAX
    - UNMATING FORCE:10N MIN(INITIAL)  
8N MIN(10000 CYCLES AFTER)
    - DURABILITY: 100,00 CYCLES MIN
  - PRODUCT NO. DESCRIPTION:

Pin Assignments	
Shell	Shield
10	MicB_SSRX+
9	MicB_SSRX-
8	GND_DRAIN
7	MicB_SSTX+
6	MicB_SSTX-
5	GND
4	ID
3	D+
2	D-
1	VBUS
PIN NO.	SIGNAL NAME

TOLERANCE:		UNIT	TXF 同心富	深圳市同心富精密电子有限公司	
X. ± 0.50	X.° ± 1°	MM		Shenzhen TXF Precision Electronics	
.X ± 0.38	.X° ± 1°	SHEET	DRAW:	Eva Chen	2010.5.7
.XX± 0.25	.XX° ± 1.0°	1/1	DESIGN:		P/N: MUB5B-12XXB002
.XXX± 0.13		SCALE	CHECK:		ITEM:
		1:1	APPR:		MICRO USB 3.0 BF ??
		REV: A			DRW NO: C-MUB5B-12XXB002

LTR	ECN NO	REVISION	RECORD	DRAW	DATE
1					
2					